

## 4099D, d:vote™ 4099D Clip Microphone for Drum



### 4099D, d:vote™ 4099D Clip Microphone for Drum

Se video: introduktion til 4099D  
til tromme og percussion

- Excellent frequency and phase response
- Capable of handling extremely high SPLs
- Compact, discreet size
- Versatility in mounting options
- Detachable cable and versatile gooseneck extender

4099D is a microphone solution that allows for high quality audio capture of drums and percussion instruments. The low profile and unobtrusive design provides visual elegance along with uncompromised sound quality and accurate dynamics.

The unique and flexible clip-on system provides fast, stable and repeatable positioning. The mics can be easily positioned at different angles via the flexible gooseneck to fit different drums and allow a variety of sound nuances. The 4099D includes a 3-pin XLR phantom power adapter.

The 4099D unveils a revolutionary new "90 degree" system which provides many more mounting options. By detaching the clip from the gooseneck and re-mounting it turned 90 degrees, the number of mic positions is doubled.

4099D can easily be combined in numerous ways and with a wide variety of microphones. For bass drum, the VC4099 clip fits perfect on the rim and makes a DPA Microphones drum-sound revelation possible at a reasonable price level.

With the d:vote 4099D capable of handling high pressure levels it is also perfect for hi-hats, cymbals, and tom-toms. Simply add the UC4099 Universal Clip to your kit. The UC4099 Universal clip is available as a separate accessory and also comes with the d:vote 4099U.

The package includes  
Supercardioid gooseneck mic with cable  
Integrated windscreen and shock mount system  
Clip to attach on drums and various percussion (also available  
separately as DC4099)  
XLR adapter

---

For more information please visit:  
[www.dpamicrophones.com](http://www.dpamicrophones.com)

# 4099D, d:vote™ 4099D Clip Microphone for Drum

## Directional characteristics:

Supercardioid

## Principle of operation:

Pressure gradient

## Cartridge type:

Pre-polarized condenser

## Frequency range:

20 Hz to 20 kHz

## Frequency range, $\pm 2$ dB, 20 cm (7.9 in) distance:

80 Hz to 15 kHz with 2 dB soft boost at 10 to 12 kHz

## Sensitivity, nominal $\pm 3$ dB at 1 kHz:

2 mV/Pa; -54 dB re. 1 V/Pa

## Equivalent noise level, A-weighted:

Typ. 28 dB(A) re. 20 mPa (max. 31 dB(A))

## S/N ratio (A-weighted), re. 1 kHz at 1 Pa (94 dB SPL):

66 dB(A)

## Total Harmonic Distortion (THD):

<1 % up to 123 dB SPL peak; <1 % up to 120 dB SPL RMS sine

## Dynamic range:

95 dB

## Max. SPL, peak before clipping:

152 dB

## Output impedance:

From MicroDot: 30 to 40 ohm; from DAD6001: 100 ohm

## Cable drive capability:

Up to 300 m (984 ft) with DAD6001 XLR adapter

## Output balance principle:

Signal balanced with DAD6001 XLR adapter

## Common Mode Rejection Ratio (CMRR):

> 60 dB from 50 Hz to 15 kHz with DAD6001 XLR adapter

## Power supply (for full performance):

Min. 5 V to max. 50 V through DPA adapter for wireless systems; 48 V phantom power  $\pm 4$  V with DAD6001 XLR adapter

## Current consumption:

Typ. 1.5 mA (microphone). 3.5 mA with DAD6001 XLR adapter

## Connector:

MicroDot

## Color:

Black

## Capsule diameter:

5.4 mm (0.2 in)

## Microphone length:

45 mm (1.8 in)

## Cable length:

1.8 m (6 ft)

## Polarity:

Positively increasing sound pressure produces positive-going voltage at MicroDot pin (and pin 2 on DAD6001 XLR adapter)

## Temperature range:

-40 °C to 45 °C (-40 °F to 113 °F)

## Relative Humidity (RH):

Up to 90%


## Gooseneck length:

140 mm (5.5 in)

## Diagrams


### 4099D, d:vote™ 4099D Clip Microphone for Drum

The proximity effect exhibited by DPA 4099

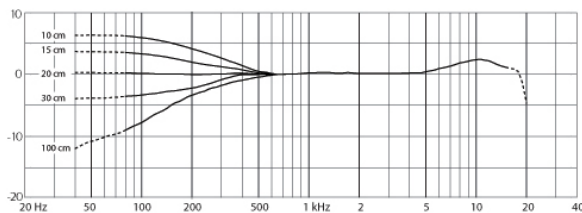


The proximity effect exhibited by DPA 4099

Typical on- and off-axis frequency response of DPA 4099 at 20 cm (7.9 in) distance

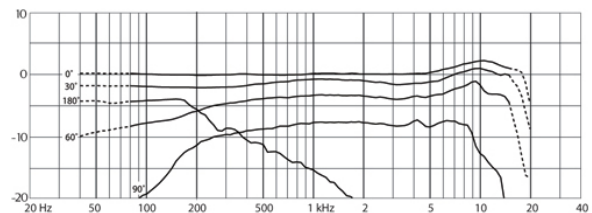

Typical on- and off-axis frequency response of DPA 4099 at 20 cm (7.9 in) distance

Directional characteristics of DPA 4099 (normalized)

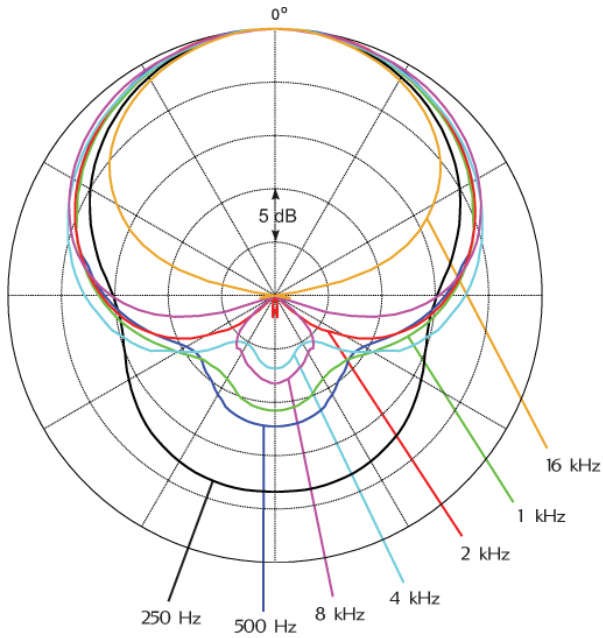

Directional characteristics of DPA 4099 (normalized)



Head Office  
DPA Microphones A/S  
Gydevang 42-44  
DK-3450 Allerød  
Denmark  
Tel: +45 4814 2828  
Fax: +45 4814 2700  
info@dpamicrophones.com  
www.dpamicrophones.com

US Sales Office  
DPA Microphones, Inc.  
1500 Kansas Avenue, Unit 3A  
Longmont, CO 80501  
USA  
Tel: +1 303-485-1025  
Fax: +1 303-485-6470  
info-usa@dpamicrophones.com  
www.dpamicrophones.com